

# DLJ Epoxy Coated Cast Iron Turbine Meters

200T, 250T, 300T, 400T, 600T, 800T



## Description

**Operation** DLJ Turbine Meters are horizontal Woltman type water meters designed for installation where occasional low and moderate to high sustained flows are demanded. Water flow drives a vertical impeller in direct proportion to the quantity of water passing through the meter. Impeller revolutions are transferred to the register assembly through a reduction gear and magnetic drive.

**Compliance** The DLJ Turbine Meters comply with AWWA C701 and ISO 4064 Class B standards.

**Installation** The meter must be installed in a clean pipeline, free of any foreign materials. Install the meter with direction of flow as indicated by the arrow cast into the meter body. You can install the meter vertically or horizontally and the registers are fully revolvable for ease of reading. It is recommended to strain the incoming water to prevent foreign debris damage and to reduce the effects of water turbulence.

**Application** The DLJ Cold Water Turbine Meters are for use only with cold water up to 120 degrees F (50 degrees C)

**Construction** The meter consists of a fully epoxy coated cast iron main case with the flow direction cast into it and a removable measuring element for easy maintenance.

Characteristics	Specifications					
	DLJ 200T 2"	DLJ 250T 2 1/2"	DLJ 300T 3"	DLJ 400T 4"	DLJ 600T 6"	DLJ 800T 8"
Flow Rating (gpm)	325	395	495	1250	2500	3450
Continuous Flow (gpm)	250	300	375	1000	2000	2800
Low Flow (gpm)	4	5	6	9	32	38
Maximum Pressure (psi)	175	175	175	175	175	175
Maximum Temperature (°F)	120	120	120	120	120	120
Sweep Hand Registers (Gallons)	10/100	10/100	10/100	10/100	10/100	10/100
Register Capacity (Millions of Gallons)	1000	1000	1000	1000	1000	1000

[watermeters.com](http://watermeters.com)

*the first and still the best online source for  
water meters*

DLJ Meter



[www.watermeters.com](http://www.watermeters.com)

# DLJ Epoxy Coated Cast Iron Turbine Meters

200T, 250T, 300T, 400T, 600T, 800T

**Direct Read Register** The register is contained in a hermetically sealed nylon casing with a 5mm tempered glass lens. The totalizer wheels are large and easy to read and the sweep hands are offset on separate 10 gallon and 100 gallon register wheels. The large black spinning trickle indicator is excellent for leak detection. Each register clearly shows its applicable meter size.




**Pulse Output** The DLJ line is available with a dry contact reed switch pulse output. This requires external DC power, 4 watts, 30VDC maximum. Contact closure is 1 pulse per **100** gallons on the 2 - 3" Turbines and 1 pulse per **1000** gallons on the 4 - 8" Turbines



**Magnetic Drive** The magnetic drive design eliminates all miscouplings associated with conventional right angle drives. Excess torque is eliminated in the encased undergear assembly, ensuring constant magnet coupling.

**Maintenance** The register/measuring assembly is easily removable and replaceable if needed, and doesn't require taking the meter off line.

**Connections** The DLJ Turbine Meters are available with standard Class 150lb ANSI flanges (4 bolt in 2, 2 1/2" and 3", 8 bolt in 4, 6 and 8"). Companion Flange sets in Cast Iron or PVC and Uni-Flanges are available for ease of connection.

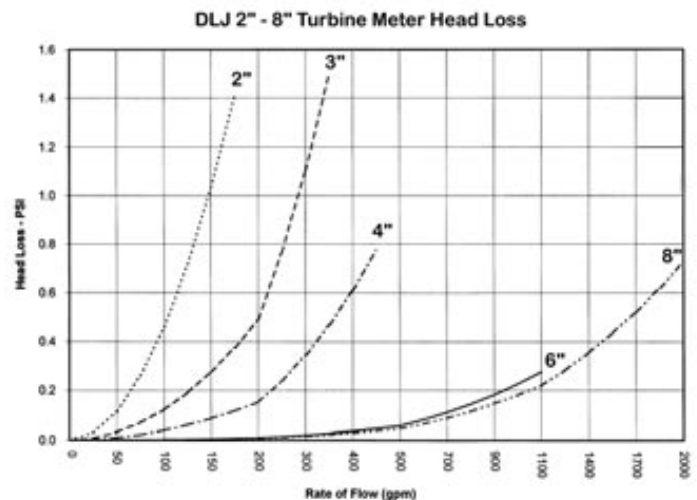

Characteristics	Specifications					
	DLJ 200T 2"	DLJ 250T 2 1/2"	DLJ 300T 3"	DLJ 400T 4"	DLJ 600T 6"	DLJ 800T 8"
Length (Inches)	12	7.75	8.75	9.75	11.6	13.6
Weight (Pounds)	32	29	35	40	92	141
Crated Weight (Pounds)	43	40	47	50	110	150

Daniel L. Jerman Co.

275 Railroad Place  
 Hackensack, NJ 07601  
 Phone 800.654.3733  
 Fax 201.487.3953  
 International Phone 201.487.7444  
 email: sales@watermeters.com

DLJ Meter



www.watermeters.com